

How to install the sensor for APL Smart and Safety Cross



The sensor is dedicated to the detection of pedestrians close to the pedestrian crossings. Follow carefully the instructions below:

- Mounting height: 3~3,5 m
- Sensor placement:
 the offset distance from the axis of the crossing
 must be from 2 m to 2,5 m anticipating the
 pedestrian crossing from the driver's point of view.
- The sensor should be positioned as close as possible to the crossing to create a "detection area" parallel to pedestrian crossing stripes in order to avoid the creation of blind spots or the activation of the system by vehicles.



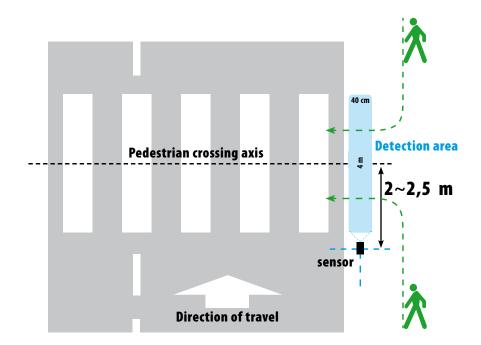

How not to install the sensor

