




## FLASHING CONTROL UNIT

Flashing control unit for road marker series.

Connectable markers	Nr. max.
Side 25	160
Kronos	40
RGR	60
PowerGround 3 HP	65
Input voltage	12/48 VDC
Functions	night dimming remote control
Duty cycle	50% 20% <10%
Dimensions	125 x 80 x 50 mm

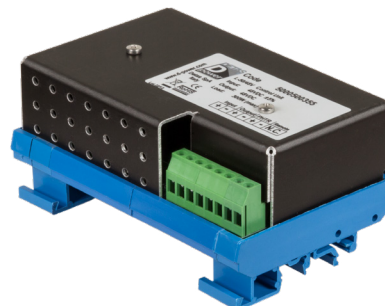

## POWER SUPPLIES

AC-DC DIN rail mountable power supply.

Model	GSA SWP10	GSA SWP20
Certifications	UL, cUL, CE	UL, cUL, CE
Input voltage	85...264 VAC	85...264 VAC
Output wattage	240 W	480 W
Output voltage	48 VDC	48 VDC
Output current	5 A	10 A
Efficiency	>94%	>94%



GSA SWP10



GSA SWP20