




BASIC 201

Basic 201 is the flat version of the Basic 200. The high luminous efficiency, the uniformity and the wide visual angles, make this product the best in its category.



Certification	UNI EN12352 L8H - L8M
Input voltage	12 VDC - 12/24 VDC
Colour	● ● ● ●
Max. power consumption	7.8 W
Dimensions	Ø 198 x 65 mm

Flashing	Power cons. @12V	
Flash LED (10%)	1.6 Ah	/day
Tri Flash (5%+5%+5%)	2.3 Ah	/day
Single (50%)	7.8 Ah	/day
Steady	15.6 Ah	/day

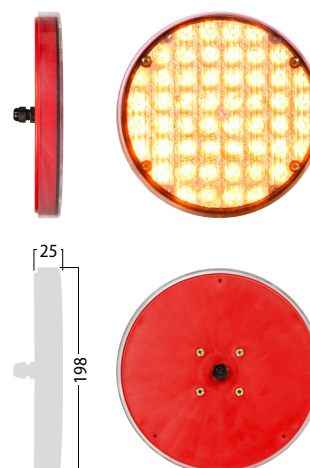

FL (FlashLed) 10% * on time 50%

Some examples of applications:

