




CABLE SEQUENCE

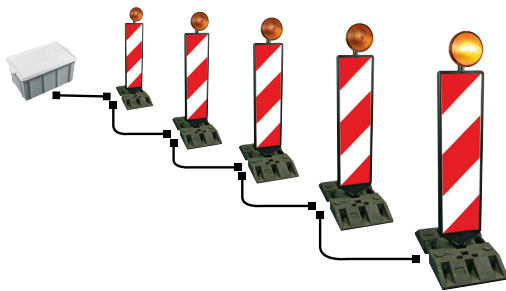
BASIC 210**LED SEQUENCE LIGHT SYSTEM
SELF-CONFIGURING.**

All the lights are the same model.
Electronic control integrated into the lights.

Standard day and night operation. on request only night.

12V standard 230/12V input on request.

Certification EN 12352	Basic 210: L8H - L8M
Sequence type	Self-configuring
Colour	
Input voltage	12 V
Connection cables	6 - 13 - 19 - 25 - 39 m
Power supply cable	10 m
Fixing	Panel adapter, bracket for 48 o 60 mm pole

**Signalling panel**

Dimensions **290 x 1330 x 50 mm**

- Without film
- With double side EG class 1 film
- With double side HI class 2 film

**Battery case**

Dimensions **680 x 410 x 320 mm**

**Base in recycled rubber**

Dimensions **800 x 400 x 120 mm**

Weight **27 kg ±15%**

