




## CABLE SEQUENCE

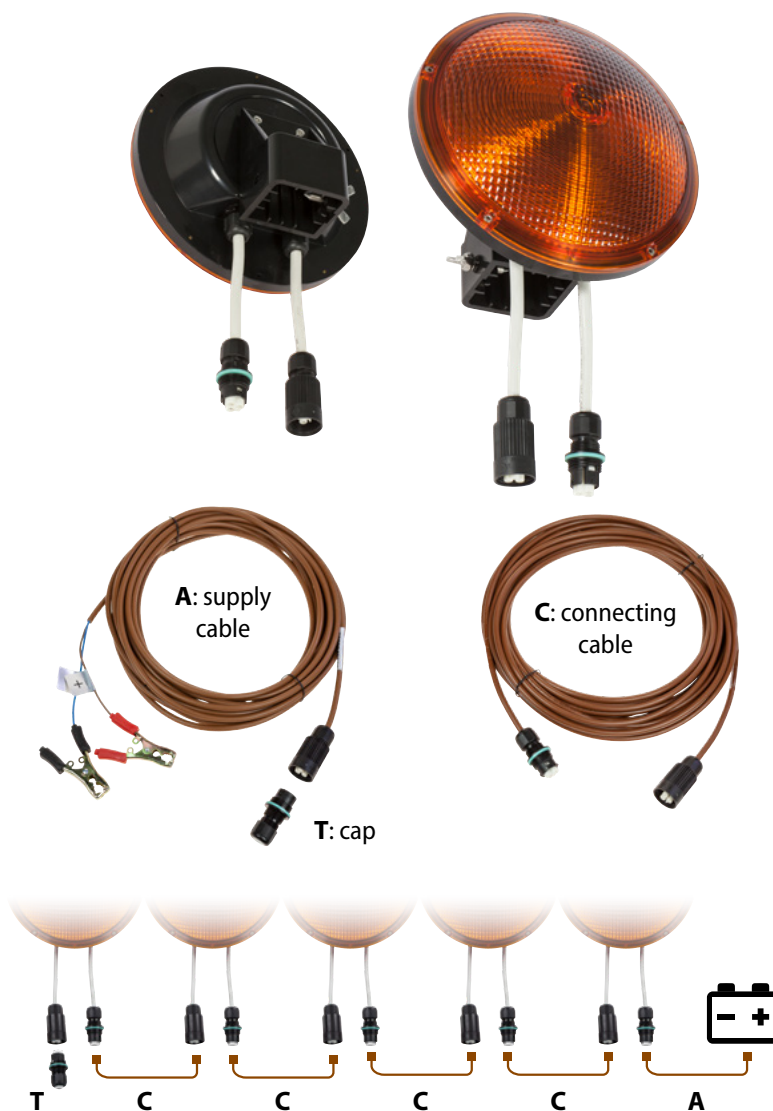
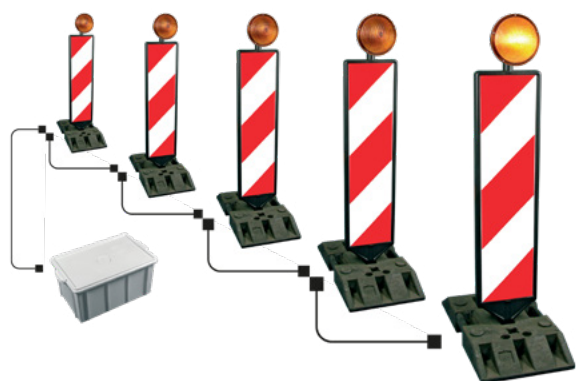
**BASIC 210****LED SEQUENCE LIGHT SYSTEM  
SELF-CONFIGURING.**

All the lights are the same model.  
Electronic control integrated into the lights.

Standard day and night operation. on request only night.

12V standard 230/12V input on request.

Certification <b>EN 12352</b>	<b>Basic 210: L8H - L8M</b>
Sequence type	<b>Self-configuring</b>
Colour	
Input voltage	<b>12 V</b>
Connection cables	<b>6 - 13 - 19 - 25 - 39 m</b>
Power supply cable	<b>10 m</b>
Fixing	<b>Panel adapter, bracket for 48 o 60 mm pole</b>

**Signalling panel**

Dimensions	<b>290 x 1330 x 50 mm</b>
------------	---------------------------

- Without film
- With double side EG class 1 film
- With double side HI class 2 film

**Battery case**

Dimensions	<b>680 x 410 x 320 mm</b>
------------	---------------------------

**Base in recycled rubber**

Dimensions	<b>380 x 750 x 115 mm</b>
------------	---------------------------

Weight	<b>27 kg ±15%</b>
--------	-------------------

