BASIC 309

Basic 309 is the flat version of the Basic 308.

The high luminous efficiency, the uniformity and the wide visual angles, make this product the best in its category.

Compliance	**EN12352 L9M**
Input voltage	**12 VDC - 12/24 VDC**
Colour	● ●
Max. power consumption	**17.5 W**
Dimensions	**Ø 333 x 64 mm**

Flashing	**Power cons. @12V**	
FlashLED (10%)	**3.0 Ah**	/day
TriFlash (5%+5%+5%)	**4.5 Ah**	/day
Single (50%)	**15 Ah**	/day
Steady	**30 Ah**	/day

Side hole version

Some examples of applications:

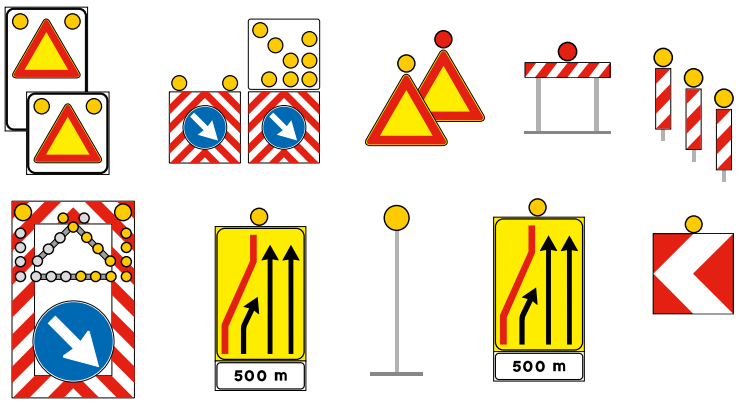

Adapter for Ø40 mm panels

DETAS SpA - D-Power division
Via Treponti, 29 - 25086 Rezzato (BS) ITALY
ISO 9001 - ISO 14001 certified company

+39 030 2594120
info@d-power.com
D-POWER.COM