



INDICATOR FLAT 3


RADAR BASED, it is the ideal active signal to encourage safe driving in schools areas, road working zones, motorway intersections, etc.

All the options can be deactivated allowing to use the device in standard mode (only amber).



Some examples of views:

Double colour display		
Speed limit function		ALTERNATING FROM TO
Smile function		ALTERNATING OR

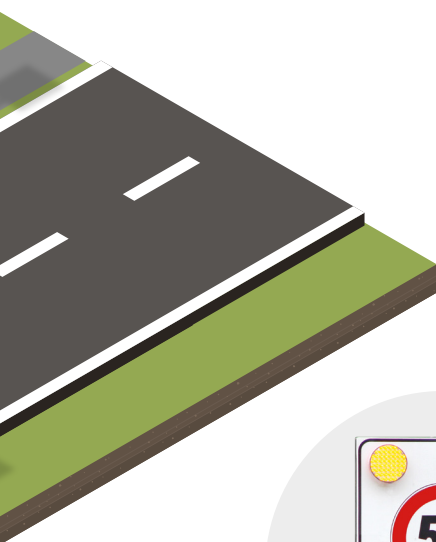

Colour	
Digit height max.	30 cm
Functions	Smile + speed limit
Powered by	Photovoltaic kit 50 W - 45 Ah
	Power supply kit 230 VAC/12 VDC
	Power supply/Battery kit 230 VAC/12 VDC 18 Ah Battery
Software	Included / App Android
Connection	Bluetooth (100m outdoor) RS232 Optional: e-mail-GSM-GPRS-GPS
Vehicle detection	Bidirectional (only statistic)
Dimensions	640 x 410 x 75 mm