






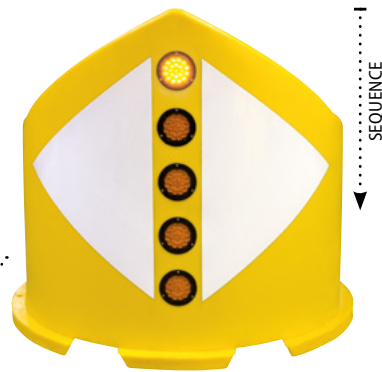


DIVIDING MARKER

IDEAL FOR JUNCTIONS, CUSPS AND OTHER DANGEROUS SPOTS.

Operating with photovoltaic panel or 230 VAC.
 LED Basic 102 sequential.
 Arrows in Class 2 film.
 Shock resistant.
 Various sizes available.



Model	5 LED lights Basic 102		3 LED lights Basic 102	
Certification	EN 12352 - L2H		EN 12352 L2H	
Colour	●		●	
Flashing	Sequence		Sync.	
Powered by		 		
	Photov. kit 20W	Power supply/ Battery kit	Power supply kit	Photovoltaic kit 10W
Dimensions	Ø 100 - Ø 150 - Ø 200 cm		Ø 60 cm	