






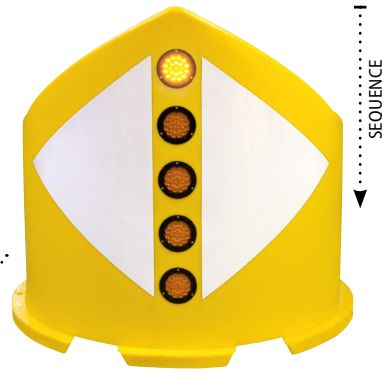

DIVIDING MARKER

IDEAL FOR JUNCTIONS, CUSPS AND OTHER DANGEROUS SPOTS.

Operating with photovoltaic panel or 230 VAC.
LED Basic 102 sequential.
Arrows in Class 2 film.
Shock resistant.
Various sizes available.



Model	5 LED lights Basic 102			3 LED lights Basic 102
Certification	EN 12352 - L2H			EN 12352 L2H
Colour	●			●
Flashing	Sequence			Sync.
Powered by		 230VAC 12VDC	 230VAC 12VDC	
	Photov. kit 20W	Power supply/ Battery kit	Power supply kit	Photovoltaic kit 10W
Dimensions	Ø 100 - Ø 150 - Ø 200 cm			Ø 60 cm