



# TALOS N

## PHOTOVOLTAIC

With **PV lighting solutions**, you can bring light in areas not accessible from the power supply, reducing the installation costs by avoiding the laying of new cables.


Our systems are characterized by the use of top quality components and oversized to ensure the best reliability:


- Use a **regulator** to protect the batteries from deep discharge and overload.
- Specific **AGM Batteries** for photovoltaic applications.
- Compact kit with battery and **electronics integrated**.
- Dimensioning based on latitude and output light required, offers a range of autonomy in the absence of sun between 5 and 10 days.

Other combinations available.



TALOS N

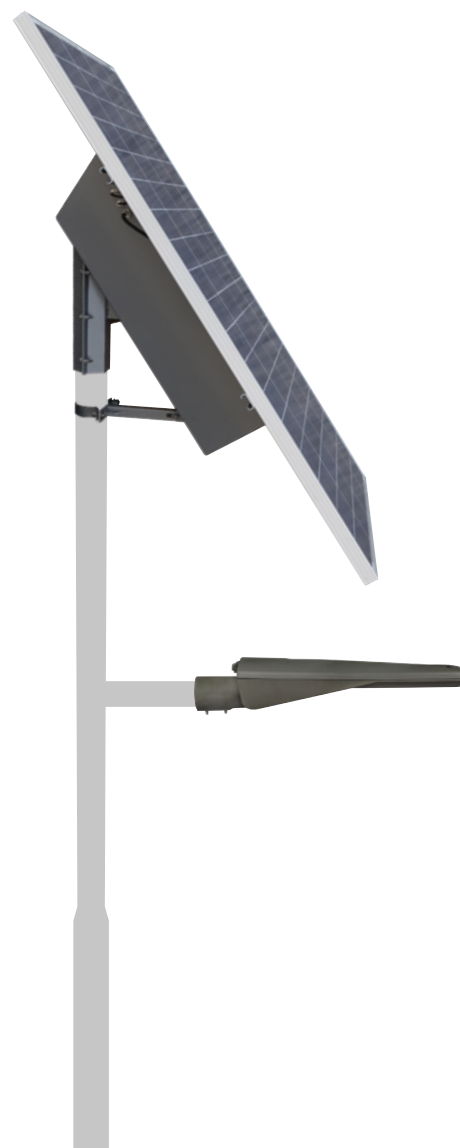

Talos N	<b>Die-cast aluminum Supercast®</b>	Tempered glass	IP66
Power cons.	<b>14 W</b>		
LED	○ <b>4000-5700 K</b>	<b>CRI &gt;70</b>	<b>L80 &gt;100.000 hrs</b>
Photovoltaic kit		<b>12 VDC</b> <b>190 W</b>	
Autonomy	<b>5...10 days</b> without sun		
Dimensions	<b>Talos N: 270 x 500 x 106 mm</b> (mounting Ø60 excluded) <b>PV panel: 1480 x 670 x 35 mm</b>		