

Special obstacle delineator

TECHNICAL FEATURES



Description

Special obstacle delineator LED sign according to EN12899 L2 class.

OPTICAL FEATURES




| | |
|--------------------|--------------------------|
| Light source | LEDs arranged on 2 lines |
| Optics | Single-side |
| Emission Area | 0.13 m ² |
| Luminous intensity | 60 cd |
| Color | Yellow |
| Optical Group Life | > 50'000 Hours |

ELECTRICAL FEATURES

| | |
|----------------------------|--------------------------|
| Power Supply | 12 Vdc (11 Vdc ÷ 13 Vdc) |
| Power consumption @ 12 Vdc | 13 W |
| Insulation class | Class III |

MECHANICAL FEATURES

| | |
|-----------------------|---|
| Operating Temperature | -10 °C ÷ +55 °C |
| IP Protection Degree | IP65 |
| Weight | 3.2 Kg |
| Dimensions | 544 x 282 x 172 mm |
| Film | Transucent Class 2 |
| Connection | 2x1 mm ² cable H07RN length 3.5 meters |
| Fixing | Standard omega guides for brackets |

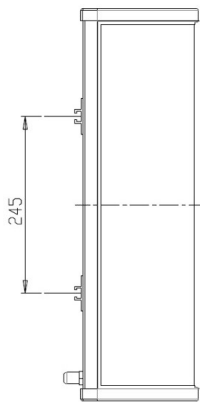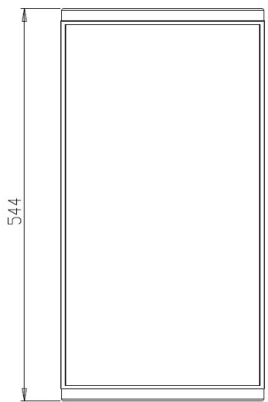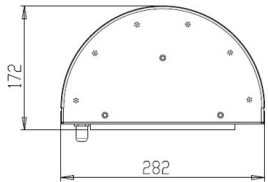

Rev. 3.0

06/10/2023

Approved TEC

Approved AQ