Indicator Lite Plus

TECHNICAL FEATURES

RoHS COMPLIANT CE

Description

Speed display with integrated radar, it is the ideal active signal for speed reduction.
Includes smile function and app-configurable text.

OPTICAL FEATURES	
Light source	LED
Color	Green, yellow, white, red, blue, cyan and magenta
Character Height	325 mm
Optical Goup Life	> 50'000 ore

ELECTRICAL FEATURES			
Power Supply	12 Vdc (11÷14 Vdc)		
Versions	50W photovoltaic panel	Power supply/battery kit 2x18Ah (integrated)	Power supply kit (integrated)
Maximum power consumption	26 W		
Time settings	Programmable days and times		
Speed detection range	5 ÷ 255 Km/h		
Speed display range	5 ÷ 199 Km/h		
Vehicle detection	Bidirectional (only statistic)		
Software	App Android included		
Connections	Bluetooth		
Special Functions	Smile + Speed Limit + Text		
Insulation class	Class III		

MECHANICAL FEATURES	
Operating temperature	-10 °C ÷ +55 °C
IP Protection Degree	IP44
Weight	10 Kg
Dimensions	605 x 870 x 150 mm
Materials	ABS
Fixing	To be fixed on pole

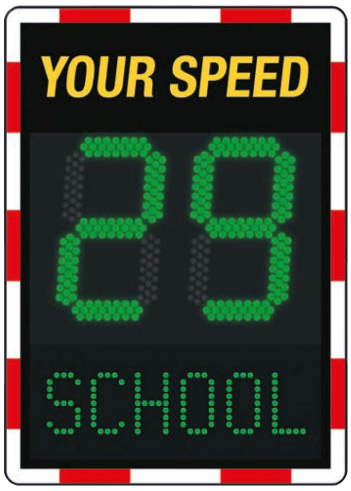

Rev. 3.0		Approved TEC		Approved AQ
10/02/2026				