


ISS 90x90

TECHNICAL FEATURES

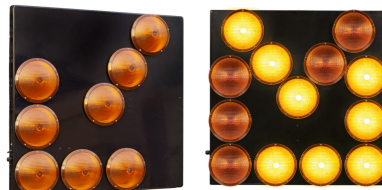

Description

90x90 LED directional arrow with Basic 211 projectors

OPTICAL FEATURES

Light source	13 Basic 211	8 Basic 211	13 Basic 211
Optics	Single-sided		
Colour	Amber		
Certification	EN12352: L8H-L8M		
Duration of the optical group	> 50'000 hours		

ELECTRICAL FEATURES

Power supply	12 ÷ 30 Vdc		
Daytime consumption Arrow	53 W	53 W	53 W
Nighttime consumption Arrow	16 W	16 W	16 W
Daytime consumption Arrow	33 W	-	33 W
Nighttime consumption Arrow	10 W	-	10 W
Flashing frequency	45 flash/min		
Flashing duty cycle	20%		
Activation	Side buttons	Side buttons	Remote control with 15m cable
Switch functions	OFF/Cross/Left arrow/Right arrow	ON/OFF	OFF/Cross/Left arrow/Right arrow
Connections	Supplied with 6 m of 2x1,5mmq H07RN cable		
Insultation class	Class III		

MECHANICAL FEATURES

Dimensions	900 x 900 x 153 mm		
Weight	14.5 Kg		
Operating temperature	-10°C ÷ +55°C		
Fixing	Omega guides for collars		
Projectors materials	Polycarbonate (Lens); PA6 (Body)		
Case material	ABS		

Optional remote control




Rev. 3.1

04/06/2025


Approved TEC

Approved AQ

13 lights version

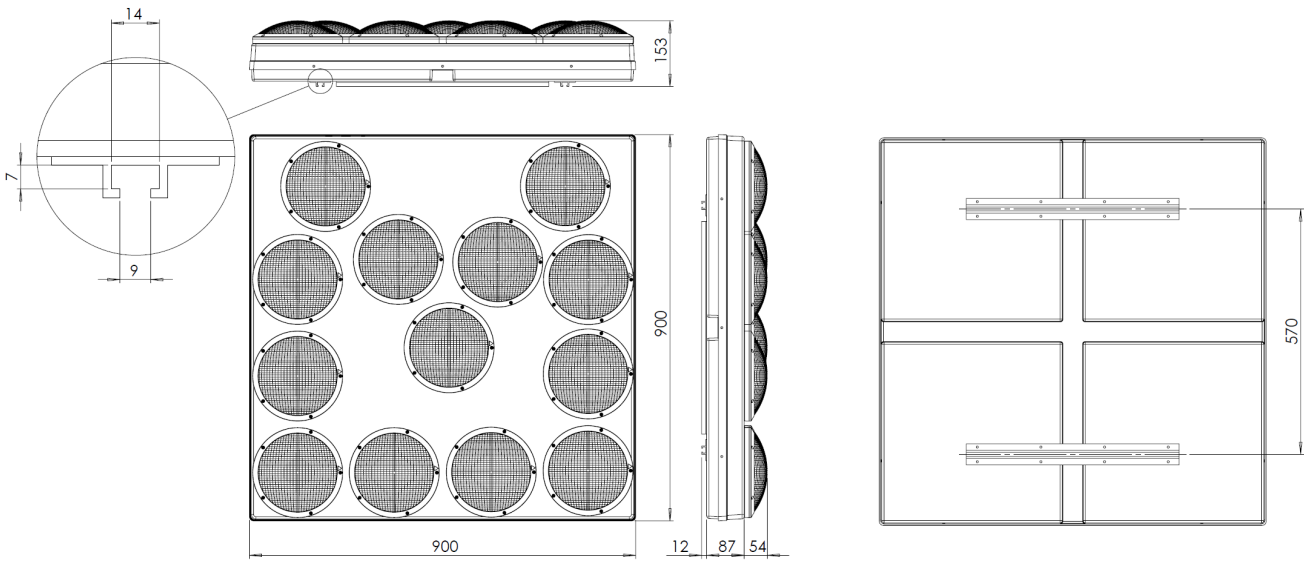

8 lights version

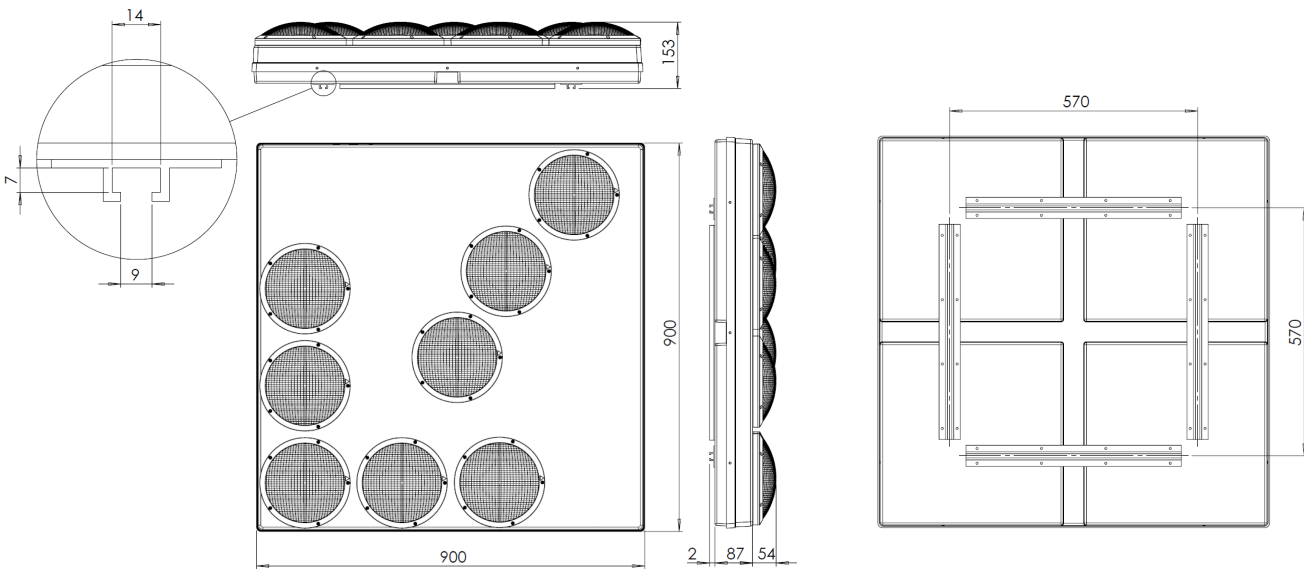

Rev. 3.1
04/06/2025

Approved TEC

Approved AQ