NX270

TECHNICAL FEATURES

Description
LED rechargeable torch with signalling kit. Dust, water and shock resistant.

OPTICAL FEATURES			
Light Source	LED		
Optics	Single-side		
Colors	White		
Total flux (100%)	300 lm		
Functioning mode	Steady light (100%)	Steady light (30%)	Flashing
Optical group lifetime	100'000 hours		
ELECTRICAL FEATURES			
Power Supply	4.8V rechargable battery Ni-Mh 3500mAh (included)		
Distance	330 m		
Charge time	8 h		
Operating time	3 h (100% steady light); 7 h (30% steady light)		
Power charger	100-240 Vac; 12/24Vdc with cigarette lighter adapter		
Insultation Class	Class III		
MECHANICAL FEATURES			
IP Protection Degree	IP65		
Weight	617g (battery included)		
Dimensions	Ø 56 x 267 mm		
Materials (body)	Aluminum		
Materials (lens)	Polycarbonate		
Charging temperature	0°C ÷ 45°C		
Operating Temperature	-20°C ÷ +60°C		
Fixing	Wall adapter and tripod		

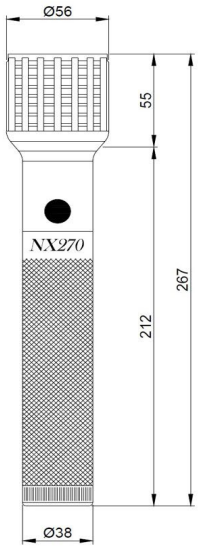

Rev. 3.0		Approved TEC		Approved AQ
09/11/2023				

DETAS S.p.A. D-Power division - Via Treponti, 29 - 25086 Rezzato (BS) ITALY - Azienda certificata ISO9001
Tel. +39 030 2594120 - Fax +39 030 2792864 - info@d-power.com - www.d-power.com