

# SolarTop 24

## TECHNICAL FEATURES



### Description

**NOT CARRIAGEABLE** LED photovoltaic road marker. The product must be installed outside the roadway

### OPTICAL FEATURES


Compliance	UNI EN1463-3	
Light source	3x2 LED	
Optics	Double-side	
Colors	Amber / Red / White / Red-White	
Luminous Intensity	> 9000 mcd	
Type of Light	Steady Light	Flashing Light at 180 f/min
Operation	Night Only - Crepuscular Turning ON	
Optical Group Life	> 10 Years	

### ELECTRICAL FEATURES

Power Supply	300 mW Photovoltaic Panel
Battery	Ni-Mh Battery (Operating time 20 days)

### MECHANICAL FEATURES

Operating Temperature	-10 °C ÷ +55 °C
Materiale	Die-cast Aluminum
IP Protection Degree	IP68
Weight	320 g
Dimensions	110 mm x 97 mm x 24.5 mm
Fixing	2 fixing holes

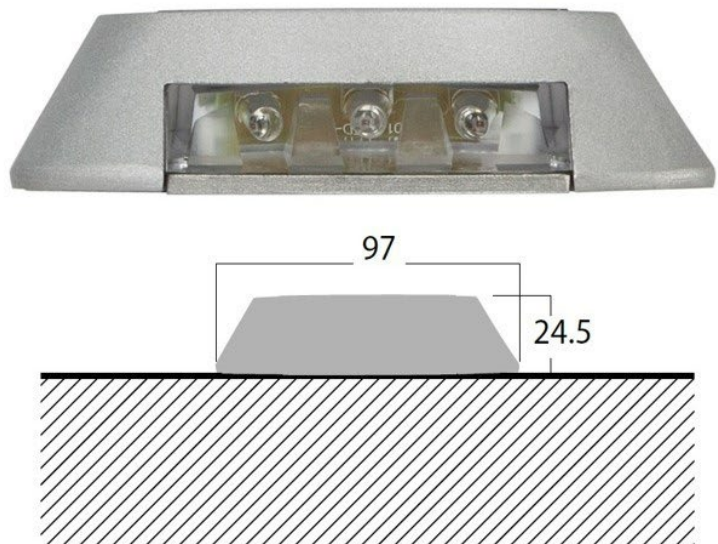

Rev. 3.0 04/02/2023		Approved TEC		Approved AQ
------------------------	--	--------------	--	-------------