

APL Smart ELV control unit

TECHNICAL FEATURES



Description


Control unit for APL Smart ELV systems.

ELECTRICAL FEATURES

Input voltage	100 ÷ 240 Vac
Output voltage (LED luminaries)	24 Vdc - twilight (night only)
Output voltage (Backlit signs)	12 Vdc - twilight (night only)
Output voltage (Flashing lamps)	12 Vdc - adjustable timer activation
Output voltage (Activation devices)	12 Vdc
Predisposition public grid	12V 18Ah Battery (not included)
Predisposition	Astronomical clock Selektta 170 TOP3 230V (not included)
Protection	Over-discharge cutoff; Overvoltages; Overcurrents
Insulation Class	Class I

MECHANICAL FEATURES

Operating temperature	-10 °C ÷ 55 °C
IP protection Degree	IP44
Weight	30 Kg
Dimensions	655 x 1100 x 300 mm
Material	Fiberglass

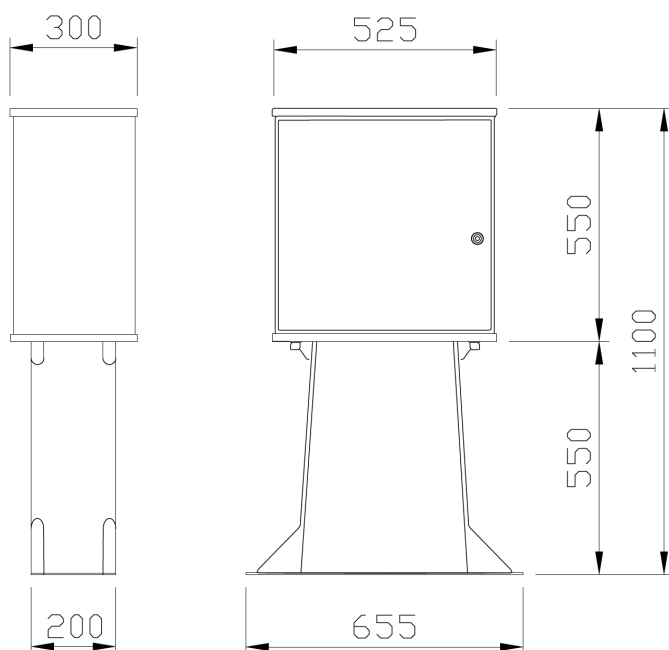

Rev. 3.0
12/03/2024

Approved TEC

Approved AQ